

BENCH MILLING MACHINE

FS28 Plus

Vario (Stepless) Speed Adjustment Digital Speed Indication (Reader)

Features:



- Automatic milling machine with X-axis power feed motor
- Automatic milling machine with Z-axis power feed motor
- LCD digital 3 axis readout
- Thread tapping mode
- Height-adjustable milling machine guard (chuck cover) with safety switch
- Digital speed reader
- Cooling system
- Machine lamp
- Control panel
- Pre-assembled steel cabinet
- CE Standard

Standard Accessories

- Operating tools

Optional Accessories:

- 210104: MT4-B16 morse taper
- 210204: MT4-ER32 collet sets, 18 pcs
- 220042: MT4-MT2 reduction sleeve
- 220043: MT4-MT3 reduction sleeve
- 250125: Milling vice 125 mm
- 260100: Rotary table 100 mm
- 270012: 14 mm T slotted, M12 mold set

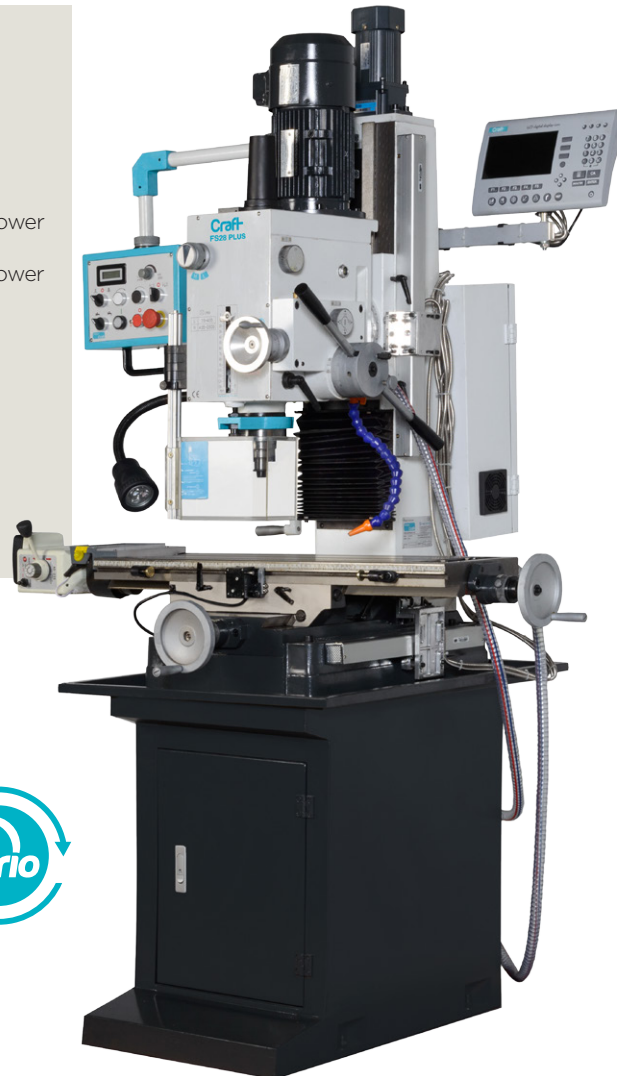

MODEL	FS28 Plus
Main Motor Power	1.5 kW, 400 V
Drilling Capacity	32 mm
End Mill (Finger Milling) Capacity	28 mm
Face Milling Capacity	63 mm
Table Size	800x240 mm
X Axis Travel	Manual: 560 mm, Automatic: 480 mm
Y axis Travel	200 mm
Z Axis Travel	430 mm
T-slots	3x14mm
Spindle Taper	MK4
Spindle Speed	75-2500 rpm
Number of Steps	2/with Vario
Spindle Travel	120 mm
Spindle Feed	0.10, 0.18, 0.26 rpm
Headstock Rotation	± 45°
Spindle to Column Distance	460 mm
Spindle-Table Distance	275 mm
Dimensions (L x W x H)	1240x930x2100 mm
Net Weight	480 Kg